

BroadSens edge-computing wireless gateways connect and control multiple wireless low-power sensors such as SVT200-A, SVT300-A, SVT400-A, SVT200-V, SVT300-V and SVT400-V. The gateways include 4-core ARM processor for real-time data visualization and processing. It integrates a time-series database InfluxDB for data review and export. Vibration analysis software BroadVibra™ is installed at the gateway for time-domain and frequency domain vibration analysis. Data can be transferred to user's clouds or servers via MQTT protocol. The gateway can be accessed with a web browser, so there is no software installation required and it is ready to use with the sensors immediately.




Wireless gateway GU300

Models	GU300	GU300S
Processor	1.5GHz quad-core 64-bit ARM CPU	
Memory	2GB, 4GB or 8GB	
MicroSD data storage	64GB, 128GB or 256GB	
Communication with sensor	2.4GHz Bluetooth low energy with Adaptive Frequency Hop (AFH) technology, AES 128-bit encryption, EIRP up to 20dBm, up to 0.1w	
Network interface	Fast Ethernet, dual-band 802.11ac wireless	
Sensor support	Up to 190 (60 SVT-A, 30 SVT-V, and 100 SVT-T sensors)	
Operating system	Linux Debian 64-bit	
Software interface	BroadVibra software based on Node-RED	
Communication protocol	MQTT, TCP/IP, UDP, Modbus TCP & RTU, OPC UA	
FCC/IC	FCC: X8WBT840X; IC: 4100A-BT840X; CE, RCM: Compliant	
Vibration analysis	Velocity, RMS, True peak, Peak-peak, STD, Crest factor, Kurtosis, trend analysis, FFT analysis, advanced filtering, frequency fine tuning, trigger modes	
Database	InfluxDB for easy data review and export	
Power supply	9-18v DC isolated	
Power consumption	<15w	
Size	141x121x31mm (5.5x4.7x1.2 inch)	141x125x28mm (5.5x4.9x1.1 inch)
Weight	490 g (1.08 lb.)	460g (1.02 lb.)
Working environment	-30 - 60 Celsius (-22 - 140 Fahrenheit), 10% ~ 90%RH	
GPIO	Yes	
Cellular network	No	Yes
Additional features	Edge computing, real time clock, OTA upgrade, USB, RS485 RTU, 2nd power connector	

Gateway features	Broadsens	Other gateways
• Plug & Play	✓	✗
• Sensor grouping	✓	✗
• Large storage	✓	✗
• Data visualization	✓	✗
• Vibration analysis	✓	✗
• Easy upgrade	✓	✗
• Web interface	✓	✗
• MQTT control	✓	✗
• FFT analysis	✓	✗
• Advanced filtering	✓	✗




Wireless gateway GU300S
with cellular network

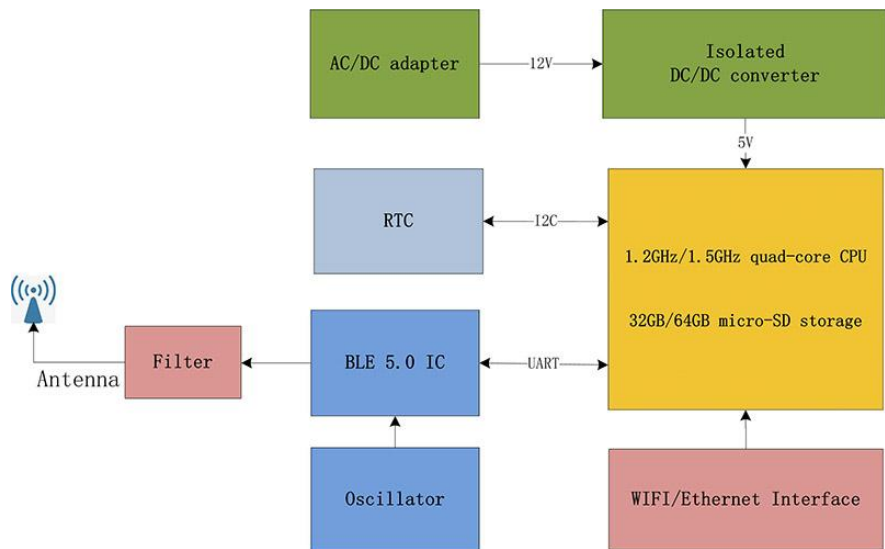


System architecture

Gateways can be mounted inside waterproof or explosive proof junction boxes. The following is an example of the gateway mounting to make the gateway waterproof.




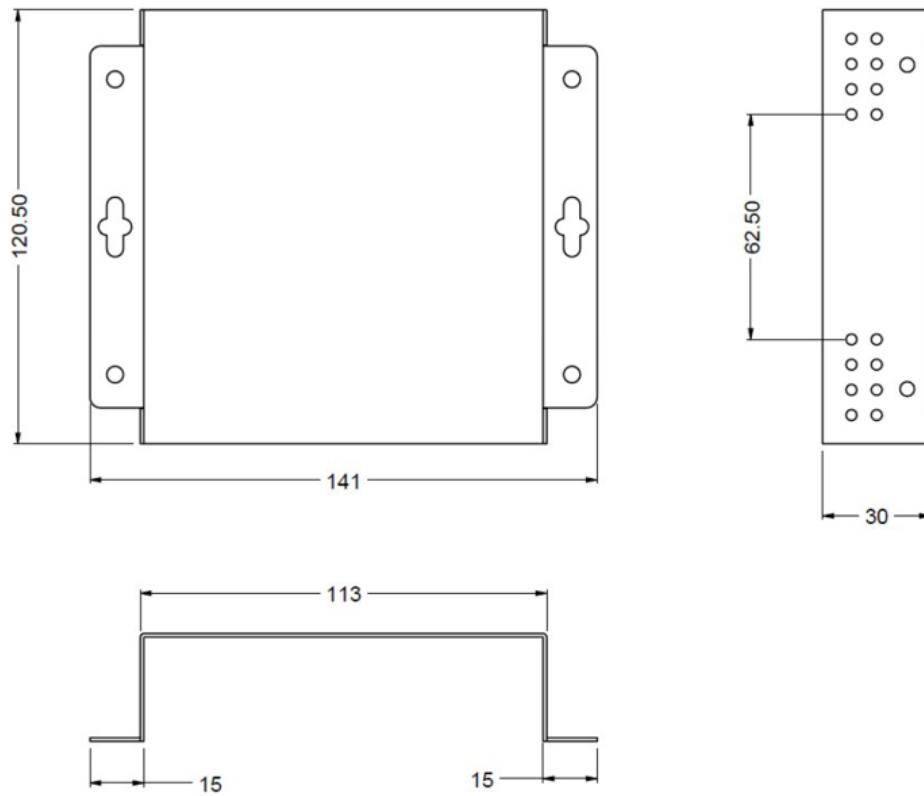


GU300 mechanical drawing

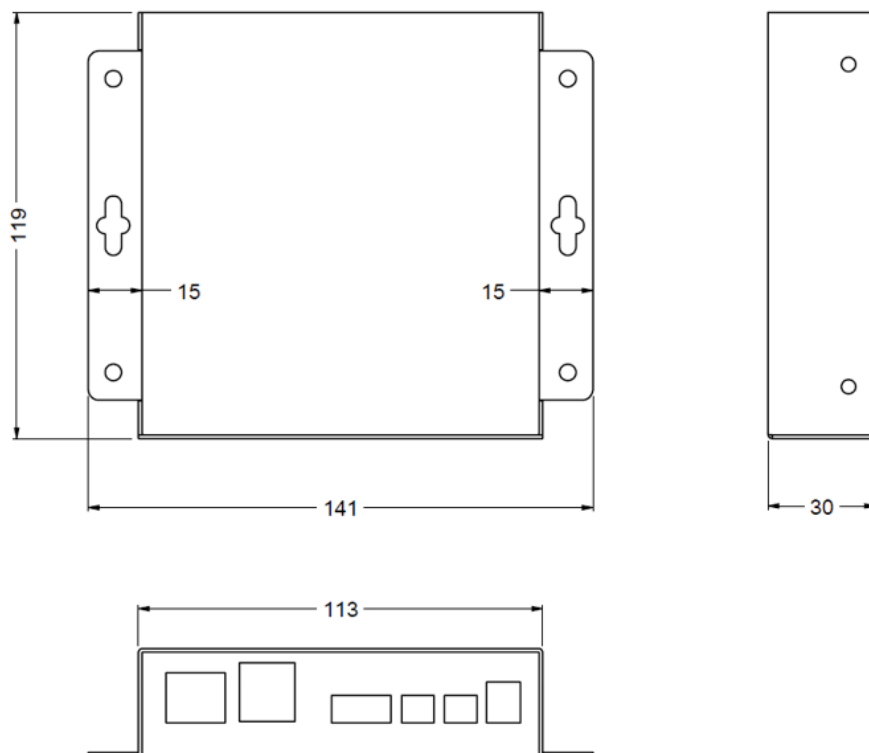

GU300S mechanical drawing

BroadVibra Software
BroadVibra software is installed inside the wireless gateway. The software has intuitive interface and can be accessed from all major web browsers remotely. The software is ideal for predictive maintenance and conditional based monitoring

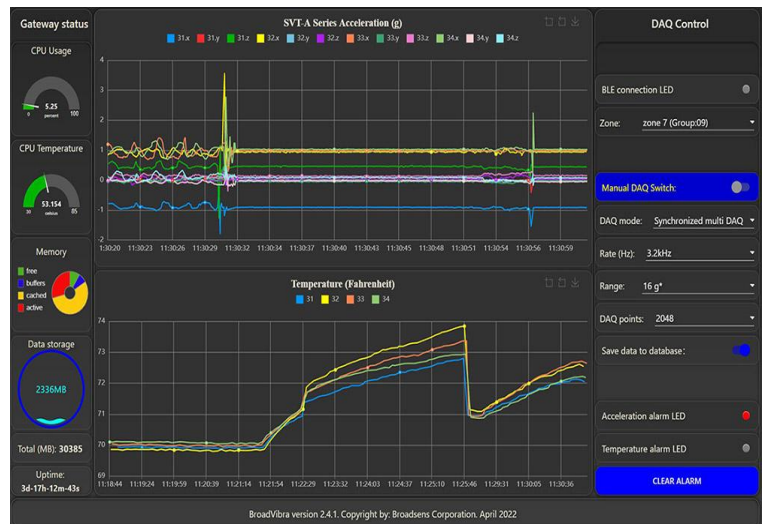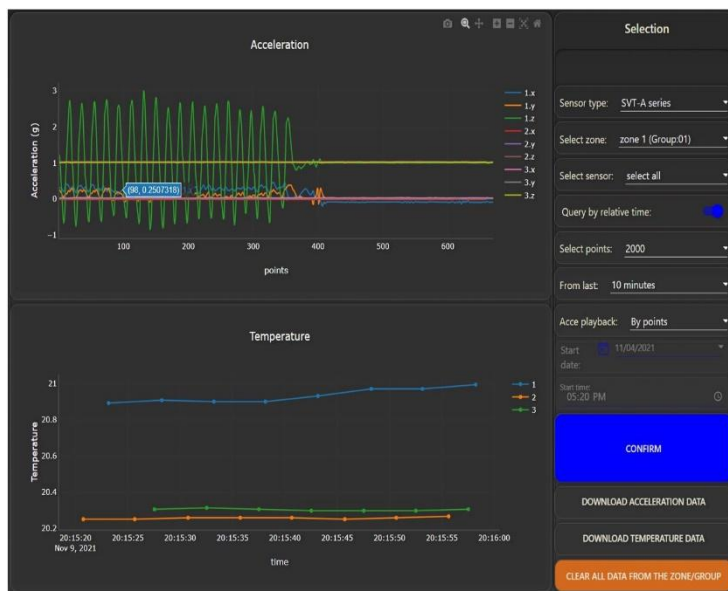

Software Advantages

- . Data visualization
- . Real time monitoring
- . Alarm setup
- . Threshold adjustment
- . Monitoring timer
- . Data replay
- . Vibration trend analysis
- . FFT analysis
- . Parameter adjustment
- . Firmware update
- . Secure data
- . Filtering

FFT analysis can be performed at each SVT-A sensor. In the figure, the top chart is the FFT waveform, and the bottom chart is the corresponding time-domain waveform. FFT result and time-domain data can be exported to CSV file. Advanced filters can be added for the time domain data and FFT analysis. User can select acceleration or velocity parameters for analysis.

“Broadsens, sense the broader world”

Website: www.broadsens.com

Sales: sales@broadsens.com

Support: support@broadsens.com

Revision: March 15, 2026

USA Headquarter

100 S Murphy Ave Ste 200, Sunnyvale, CA, 94086

Distributors

[Contact Broadsens](#)